



ATTACHED TO YOUR WORLD

# Grout and silicones with a perfect colour match


MULTI GROUT PLUS, FLEX GROUT PLUS AND  
S755 SILICONE BATH & KITCHEN P

PROVIDES AESTHETIC UNIFORMITY

DURABLE OVER A LONG PERIOD OF TIME

FLEXIBLE AND LIGHTWEIGHT

WIDE RANGE OF USES

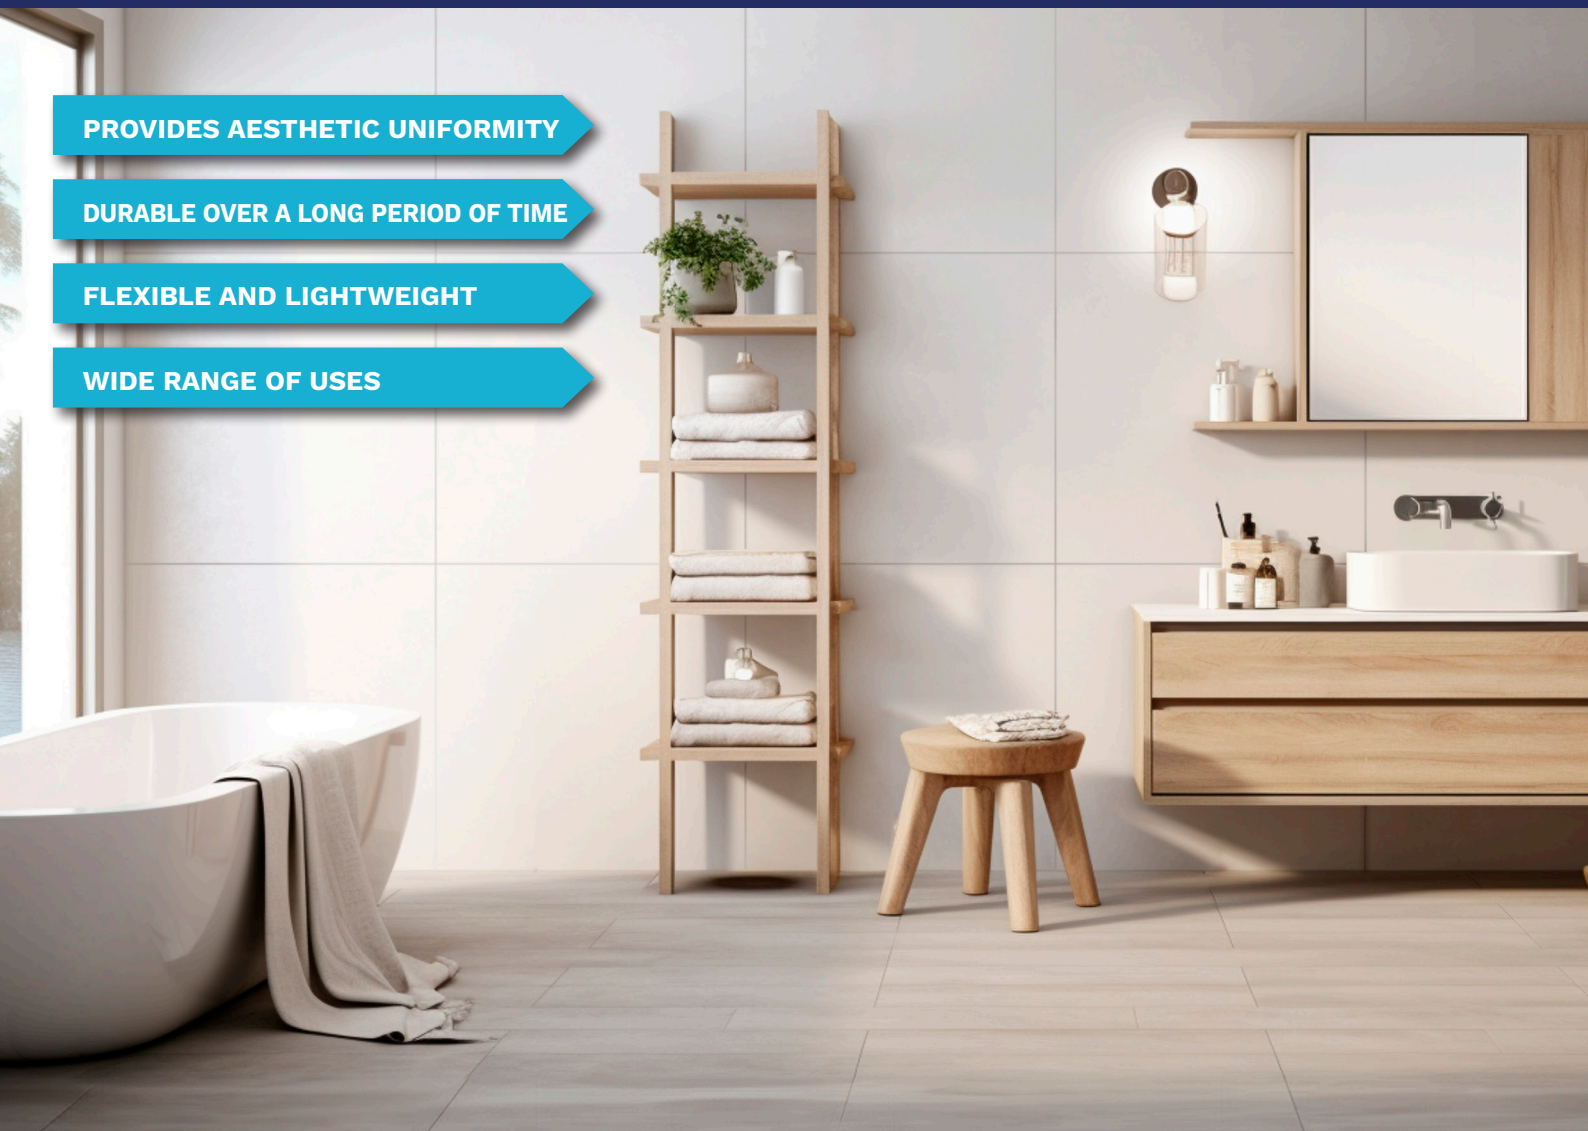

# Get a beautiful and reliable result with grouts and silicone joints from Bostik

Take your tiling project to the next level with Bostik's new cement-based grouts MULTI GROUT PLUS and FLEX GROUT PLUS. In combination with the premium silicone S755 SILICONE BATH & KITCHEN P you will have the best potential to make the highest quality tiled surfaces with perfect colour matching.



## CONSUMPTION CEMENT-BASED GROUT KG/M<sup>2</sup>

TILE SIZE	2 MM JOINT	3 MM JOINT	4 MM JOINT	5 MM JOINT	6 MM JOINT	8 MM JOINT	10 MM JOINT	15 MM JOINT
5 x 5 cm	0,8	1,2	1,5	1,6	2,2	-	-	-
10 x 10 cm	0,4	0,6	0,8	1,0	1,2	1,6	1,9	2,6
10 x 20 cm	0,3	0,5	0,6	0,8	0,9	1,2	1,5	2,1
15 x 15 cm	0,3	0,4	0,6	0,7	0,8	1,1	1,3	1,9
20 x 20 cm	0,2	0,3	0,4	0,5	0,6	0,8	1,0	1,5
20 x 25 cm	0,2	0,3	0,4	0,5	0,6	0,7	0,9	1,3
25 x 25 cm	0,2	0,3	0,3	0,4	0,5	0,7	0,8	1,2
30 x 30 cm	0,1	0,2	0,3	0,4	0,4	0,6	0,7	1,0
30 x 60 cm	0,1	0,2	0,2	0,3	0,3	0,4	0,5	0,8
60 x 60 cm	0,1	0,1	0,1	0,2	0,2	0,3	0,4	0,5

**NOTE!** Based on 6 mm joint depth.

SMART CHOICE!

## CHOOSE FROM 12 POPULAR COLOURS

Discover Bostik's wide range of wall/floor and silicone grout colours for bathrooms, kitchens and other ceramic tile surfaces. Choose from the most popular colours on the market for a perfect match and uniform look. All products are designed to withstand heavy loads and are also dirt-repellent.



# DURABLE AND LIGHTWEIGHT GROUTS FOR ALL YOUR NEEDS

Choose MULTI GROUT PLUS for projects with absorbent ceramic tiles and FLEX GROUT PLUS for projects with non-absorbent ceramic tiles.



## MULTI GROUT PLUS

**Cement-based grout with extra fine structure, suitable for absorbent ceramic tiles. Grout width 1–5 mm.**

### RANGE OF APPLICATIONS

Bostik Multi Grout Plus is a polymer-modified cement-based grout with high durability and water-repellent properties. Can be used both indoors and outdoors. The grout is easy to clean.

Multi Grout Plus can be used for grouting tiles, mosaics, natural stone, ceramics, etc., on both walls and floors. Multi Grout Plus is particularly suitable for softer, more absorbent ceramic tiles.

### TECHNICAL DATA

**Working temperature:** +5 °C to +25 °C  
**Joint width:** Up to 5 mm  
**Particle size:** Extra fine structure  
**Application time:** 1–2 hours at 20 °C  
**Can be walked on:** At least 12 hours at 20 °C  
**Fully loadable:** 7 days at 20 °C  
**Shelf life:** 24 months at 20 °C in unopened packaging. Store in a dry and cool place.



ARTICLE NO.	COLOUR	WEIGHT	EACH/PALLET	EAN
30626042	White	5 kg	224	7311020082406
30625998	White	20 kg	48	7311020082413
30625803	Cream White	5 kg	224	7311020082475
30625995	Light Beige	5 kg	224	7311020082499
30625873	White Grey	5 kg	224	7311020082369
30625872	White Grey	20 kg	48	7311020082376
30625857	Manhattan	5 kg	224	7311020082383
30625974	Cement Grey	5 kg	224	7311020082505
30627241	Grey	5 kg	224	7311020082963
30625977	Stone Grey	5 kg	224	7311020082420
30625975	Dark Brown	5 kg	224	7311020082451
30626004	Black	5 kg	224	7311020082444

**NOTE!** The final colour results are affected by the substrate/adhesive, amount of water, width, depth and temperature.



## FLEX GROUT PLUS

**Fast-curing, cement-based grout, suitable for non-absorbent ceramic tiles. Flexible grout width 2–20 mm.**

### RANGE OF APPLICATIONS

Bostik Flex Grout Plus is a durable, light-textured cement-based grout with long-lasting water and dirt repellent properties. Can be used both indoors and outdoors. The grout is easy to clean.

Flex Grout Plus can be used for grouting ceramic tiles, mosaics, natural stone, granite, etc., on both walls and floors. Flex Grout Plus is particularly suitable for hard, non-absorbent ceramic tiles.

### TECHNICAL DATA

**Working temperature:** +5 °C to +25 °C  
**Joint width:** 2–20 mm  
**Particle size:** Fine structure  
**Application time:** 1–2 hours at 20 °C  
**Can be walked on:** At least 8 hours at 20 °C  
**Fully loadable:** 7 days at 20 °C  
**Shelf life:** 24 months at 20 °C in unopened packaging. Store in a dry and cool place.



ARTICLE NO.	COLOUR	WEIGHT	EACH/PALLET	EAN
30626065	White	5 kg	224	7311020082574
30625761	Cream White	5 kg	224	7311020082635
30625778	Ivory	5 kg	224	7311020082581
30625843	Light Beige	5 kg	224	7311020082659
30625659	White Grey	5 kg	224	7311020082611
30625660	White Grey	20 kg	48	7311020082628
30625657	Manhattan	5 kg	224	7311020082512
30625656	Manhattan	20 kg	224	7311020082529
30625785	Cement Grey	5 kg	224	7311020082666
30627233	Grey	5 kg	224	7311020082970
30625664	Stone Grey	5 kg	224	7311020082536
30625663	Stone Grey	20 kg	48	7311020082543
30625661	Anthracite Grey	5 kg	224	7311020082550
30625662	Anthracite Grey	20 kg	48	7311020082567
30625999	Black	5 kg	224	7311020082604

# S755 SILICONE BATH & KITCHEN P ELIMINATES PROBLEMS

S755 SILICONE BATH & KITCHEN is a highly mould-resistant caulk that prevents moisture, UV radiation and corrosion from metals. The high quality ensures long durability – a safe and reliable choice.



MOULD RESISTANT

UV-RESISTANT

SMOOTH & EASY TO APPLY

WIDE RANGE OF USES

## S755 SILICONE BATH & KITCHEN P

Premium silicone for bath and construction joints

### RANGE OF APPLICATIONS

Bostik S755 SILICONE BATH & KITCHEN P is a versatile, neutral silicone jointing mastic for bath and construction joints that cures by reacting to moisture to form a durable elastic joint. The silicone jointing mastic has a very high resistance to mould and is specially developed for durable elastic grouts in kitchens, bathrooms, showers and building elements, as well as for window sealing and industrial applications.

### SURFACE

Tiles, porcelain, glass, glazed surfaces, metal, and perfect adhesion to the most common building materials.

### TECHNICAL DATA

**Curing time:** At +23°C/50% relative humidity 2 mm/24 hours  
**Expansion area:** ±25% of the initial grout width  
**Overcoatable:** No



ARTICLE NO.	COLOR	NCS	VOLUME	EACH/PACKAGE	EACH/PALLET	EAN
30627124	White	S0500-N	300 ml	12	1248	7311020082901
30627211	Cream White	S0502-Y	300 ml	12	1248	7311020082925
30626082	Ivory	S2005-Y50R	300 ml	12	1248	7311020082758
30627701	Light Beige	S1505-Y40R	300 ml	12	1248	7311020083106
30626071	White Grey	S1500-N	300 ml	12	1248	7311020082741
30626554	Manhattan Grey	S2500-N	300 ml	12	1248	7311020082727
30627703	Cement Grey	S3005-Y	300 ml	12	1248	7311020083090
30626083	Stone Grey	S5000-N	300 ml	12	1248	7311020082772
30626068	Dark Beige	S3030-Y20R	300 ml	12	1248	7311020082703
30626067	Dark Brown	S6020-Y50R	300 ml	12	1248	7311020082697
30626084	Anthracite	S7500-N	300 ml	12	1248	7311020082765
30626578	Black	S9000-N	300 ml	12	1248	7311020082710
30627201	Transparent		300 ml	12	1248	7311020082918

# Don't miss out on other recommended products!



**A**  
**GROUT FINISHER**  
Tool for evening out and smoothing joints.



**B**  
**T500 FINISHING SOAP**  
Environmentally-friendly finishing soap for evening out applied grout before drying.



**C**  
**MAXI SEALANT GUN**  
Robust metal glue and gun for several types of caulk and glue types. Provides 250 kg pressure.



**D**  
**WATERPROOFING MEMBRANE FOIL PRO LX**  
Film with good crack-bridging and deformation-absorption capacity.



**E**  
**8070 LIGHT LT**  
Adhesive with light filler.



**F**  
**8050 WHITE DR**  
White, dust-reducing adhesive.



**G**  
**8010 COMBI**  
All-purpose adhesive for floors and walls



**H**  
**MEMBRANE**  
Economical waterproofing layer with short drying time.



**I**  
**FOILTAC 1C**  
Light 1-component foil adhesive for wet rooms.



**BOSTIK SERVICE**

[info.se@bostik.com](mailto:info.se@bostik.com)  
[www.bostik.se](http://www.bostik.se)

